
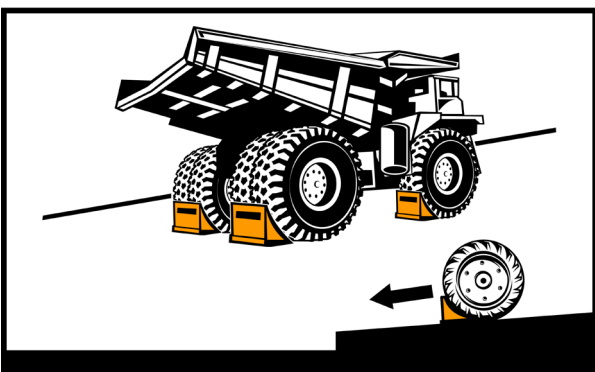
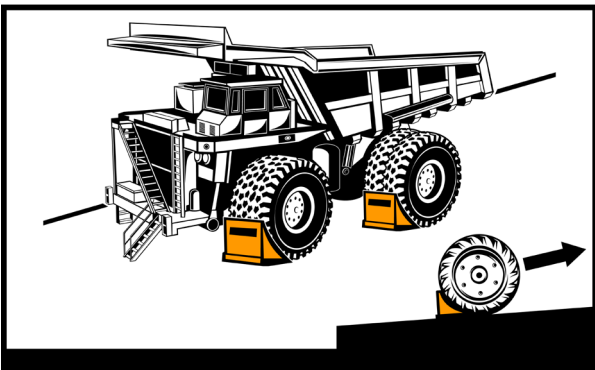
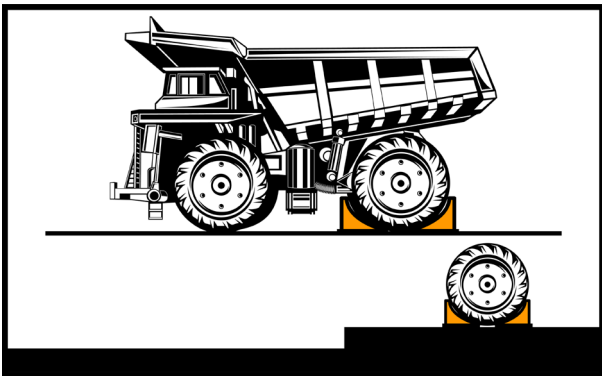


# HOW TO USE YOUR OZCHOKS® SAFELY

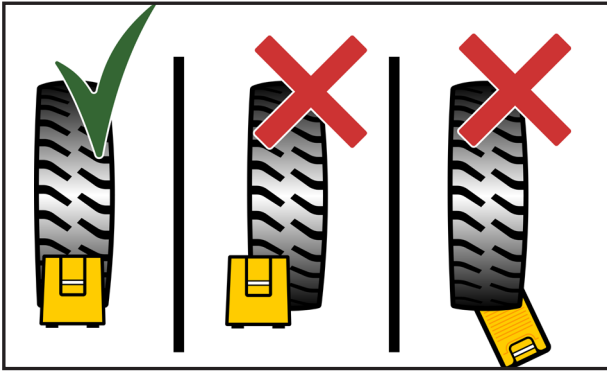

- Always conduct a risk assessment prior to use of OZCHOKS®
- Choose the appropriate OZCHOKS® to vehicle type and wheel size
- Do not use damaged OZCHOKS®
- Never drive over OZCHOKS® as this can damage chocks, tyre or vehicle
- The vehicle must be at a complete stop with parking brake applied before placing the OZCHOKS®
- OZCHOKS® must always be used in pairs. Multiple pairs may be required in extreme grades and conditions
- Place OZCHOKS® securely against the centre of the tyre tread of each wheel making firm contact with the whole tyre surface
- Position OZCHOKS® in the direction of the grade. When vehicle is on a slope the OZCHOKS® will be placed on the downhill side of the lowest wheels on the slope. On level ground OZCHOKS® should be placed in front of and behind the front wheel to prevent the movement in either direction
- Always remove OZCHOKS® before attempting to move vehicle
- Make sure that when using OZCHOKS® on steer wheels that steer wheels are aligned in a straight position. Chock the front and rear on all steer wheels taking into consideration the axle configuration, ie single or twin steer
- Assess type and condition of road surface and weather conditions before implementing on a firm surface.